



SHG CABLE LTD

Add: Linglong Industry Zone, Linan Zhejiang, 311300 P.R.C.


Tel: 0086-571-61062382

Fax: 0086-571-61062383

Website: www.shgcable.com

E-mail: sales@shgcable.com

• FTTH drop Cable

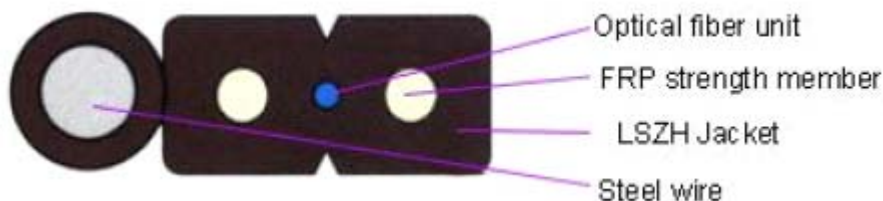

Description

The optical fiber unit is positioned in the centre. Two parallel Fiber Reinforced Plastics (FRP) are placed at the two sides. Then the cable is completed with a black or color LSZH sheath.

Characteristics

- ◆ Special low-bend-sensitivity fiber provides high bandwidth and excellent communication transmission property;
- ◆ Two parallel FRP strength members ensure good performance of crush resistance to protect the fiber;
- ◆ Simple structure, light weight and high practicability;
- ◆ Novel flute design, easily strip and splice, simplify the installation and maintenance;
- ◆ Low smoke, zero halogen and flame retardant sheath.

Optical Characteristics

		G.652	G.655	50/125μm	62.5/125μm
Attenuation (+20°C)	@850nm			≤3.5 dB/km	≤3.5 dB/km
	@1300nm			≤1.5 dB/km	≤1.5 dB/km
	@1310nm	≤0.45 dB/km	≤0.50 dB/km		
	@1550nm	≤0.30 dB/km	≤0.50dB/km		
Bandwidth (Class A)	@850nm			≥500 MHz·km	≥200 MHz·km
	@1300nm			≥1000 MHz·km	≥600 MHz·km
Numerical Aperture				0.200±0.015NA	0.275±0.015NA
Cable Cut-off Wavelength λ _{cc}		≤1260nm	≤1480nm		

Technical Parameters

Fiber Count	Cable Diameter (mm)	Cable Weight (kg/km)	Tensile Strength Long/Short Term (N)	Crush Resistance Long/Short Term (N/100mm)	Bending Radius Static/Dynamic (mm)
1	(2.0±0.2)×(3.0±0.2)	8	30/60	300/1000	15/30
2	(2.0±0.2)×(3.4±0.2)	8.5	30/60	300/1000	15/30
1	(2.0±0.2)×(3.8±0.2)	9	30/60	300/1000	15/30
4	(2.0±0.2)×(4.0±0.2)	10	30/60	300/1000	15/30

Storage/Operating Temperature : -20°C to + 60°C